
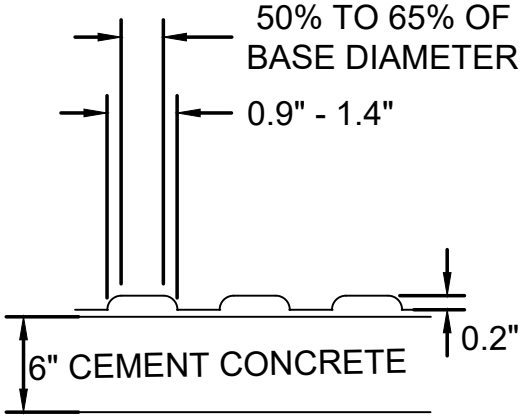


SECTION A-A

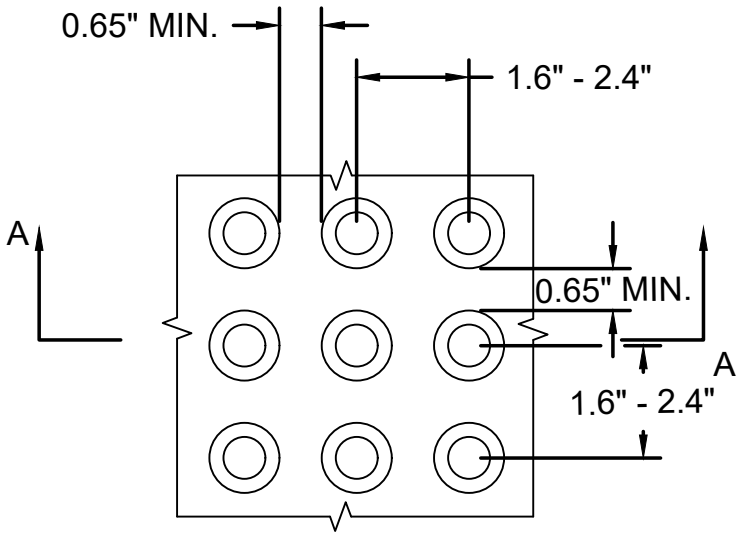

DETAIL OF DETECTABLE WARNING PANEL

NOTES:

1. DETECTABLE WARNING PANELS SHALL BE PERMANENTLY APPLIED TO THE PEDESTRIAN RAMP.
2. DETECTABLE WARNING PANELS SHALL MATCH THE WIDTH OF THE PEDESTRIAN RAMP.
3. DETECTABLE WARNING PANELS SHALL BE CAST IRON UNLESS OTHERWISE SPECIFIED BY PWD.
4. DETECTABLE WARNING PANELS SHALL BE FEDERAL YELLOW, CONFORMING TO THE REQUIREMENTS OF FEDERAL NO. 33538, UNLESS OTHERWISE SPECIFIED BY PWD. IF BRICK RED COLOR IS REQUESTED BY PWD, IT SHALL CONFORM WITH RAL 2001.
5. DETECTABLE WARNING PANELS SHALL BE INSTALLED PER THE MANUFACTURER'S RECOMMENDATIONS.
6. THE LOCATION OF THE DETECTABLE WARNING PANELS SHALL COMPLY WITH PROWAG R305.2. WHERE A CONCRETE BORDER IS REQUIRED FOR PROPER INSTALLATION OF A DETECTABLE WARNING SURFACE, A CONCRETE BORDER NOT EXCEEDING 2 INCHES SHALL BE PERMITTED ON ALL SIDES OF THE DETECTABLE WARNING SURFACE EXCEPT BETWEEN THE DETECTABLE WARNING SURFACE AND THE EDGE OF PAVEMENT WHERE A SETBACK IS ALREADY PERMITTED.
7. DETECTABLE WARNING PANELS SHALL BE CUT TO FIT AS REQUIRED BY THE DESIGN AND OR ENGINEER TO COMPLY WITH ALL RELEVANT PROWAG REQUIREMENTS.

Public Works Department
Engineering Division
1 CITY HALL SQUARE, ROOM 710
BOSTON, MA 02201
(617) 635-4968

PEDESTRIAN RAMP - DETECTABLE WARNING PANEL	DATE OF ISSUE: JULY 2026	DETAIL NO. R.5
	SCALE: N.T.S.	