

2" AND 2 1/2" SQUARE SIGN POST INSTALLATION (12' POST)


Grass Plots, Concrete, Brick & Bituminous Concrete Sidewalk
Excavation Unlimited

NOTES:

Sign posts to be 14 gauge steel posts conformed to the standard specification for Hot-Rolled carbon sheet steel, structural quality, ASTM designation A570-79

Die - Punched knockout/holes shall be seven sixteenths ($\frac{7}{16}$ ") inch plus or minus one sixty-fourth ($\frac{1}{64}$ ") inch on 1" centers, on four (4) opposite sides for the entire length of the post.

Knockout/holes shall be on the center line of each side in true alignment and opposite to each other.

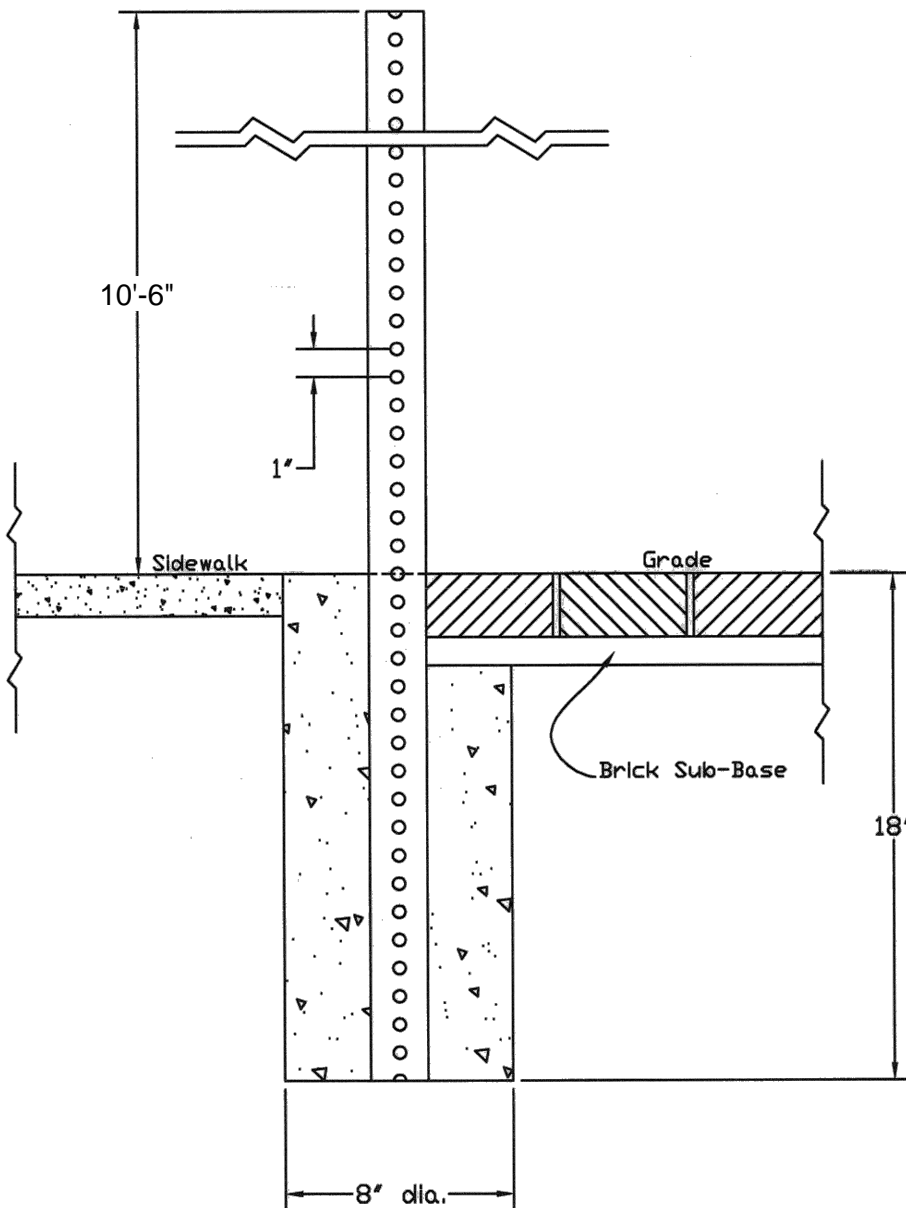

CONCRETE BASE SHALL CONSIST OF:

- a) one (1) part highearly strength cement.
- b) one & one half ($1\frac{1}{2}$) parts clean, sharp sand.
- c) three (3) parts coarse aggregate.
- d) clean water to form mixture.

DATE: JUL. 8, 1996 REV: OCT. 28, 2014 REV: FEB 28, 2015