


**EDGE OR CORNER SEAMS:**  
THE TWO METHODS FOR SECURING EDGE OR CORNER SEAMS, SHOWN HERE, USE THE SINGLE LOCK PRINCIPLE.  
THE MEMBER FORMING THE UNDERSIDE OF THE LOCK WOULD NORMALLY BE CLEATED BEFORE THE UPPER MEMBER IS ENGAGED .  
DEPENDING ON PREVAILING CONDITIONS, ONE OPTION IS TO DRESS DOWN THE LOCK AS SHOWN.

**GENERAL SPECIFICATIONS**

**MATERIALS**  
ANODIZED ALUMINUM SHEET FOR BUILDING CONSTRUCTIONS OR EQUIVALENT.  
ONLY DOMESTIC MATERIALS SHALL BE USED WHEN AVAILABLE.  
ANY SHEET METAL SHOWN ON DRAWINGS AND NOT OTHERWISE SPECIFIED SHALL BE 16 oz. COLD ROLLED ALUMINUM.  
SHEETS SHALL CONFORM TO ASTM SPECIFICATIONS B209 OR FEDERAL SPECIFICATION QQ-C-5762Q2QQQ OR EQUIVALENT.

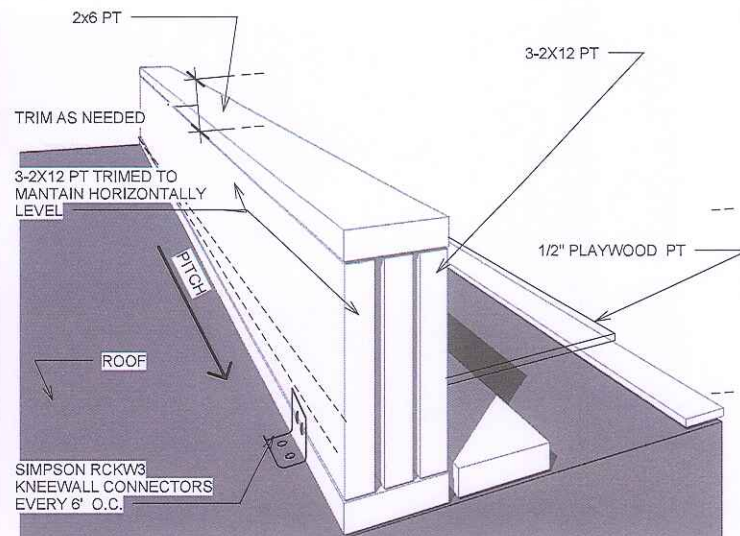

① 3D View 1




LALA ASSOCIATES ENGINEERS LLC  
37 OLD VILLAGE ROAD, ACTON, MA 01720  
LIC.#40460-C(EXP 6/30/20)

LALAENGINEERS@GMAIL.COM / 978 337 5252

KENSINGTON INVESTMENT COMPANY

347 CONGRESS ST  
BOSTON MA



Description	Date

PROPOSED ROOF PARAPET

Project number	19160	A1
Date	7/31/2019	
Drawn by	DRV	
Checked by	KL	Scale 1" = 1'-0"















