


Typical Detail for Special Emphasis Crosswalks

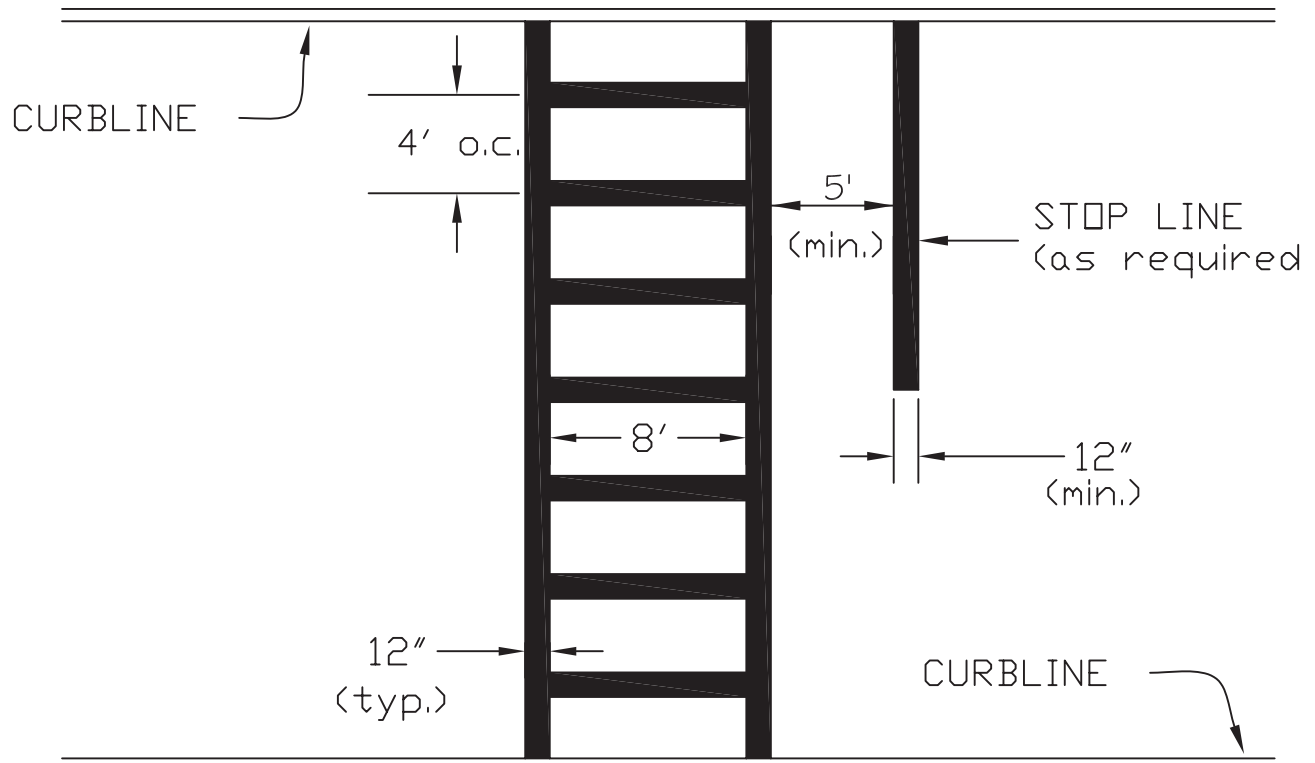

Notes:

- 1.) All twelve inch (12") thermoplastic lines shall be applied in one (1) application, no combination of lines (i.e. two 6" lines will be accepted).
- 2.) Layout of crosswalks shall be approved by a Boston Transportation Department (BTD) Engineer prior to thermoplastic being applied.
- 3.) All crosswalks installed shall conform to all relevant provisions of the Massachusetts Highway Department "Standard Specifications for Highway and Bridges" dated 1988, Section 860 regarding Reflectorized Pavement Markings & material m7.01.20, latest revisions.
- 5.) "Special Emphasis" crosswalks shall be installed at the direction of a Boston Transportation Department Engineer only.